
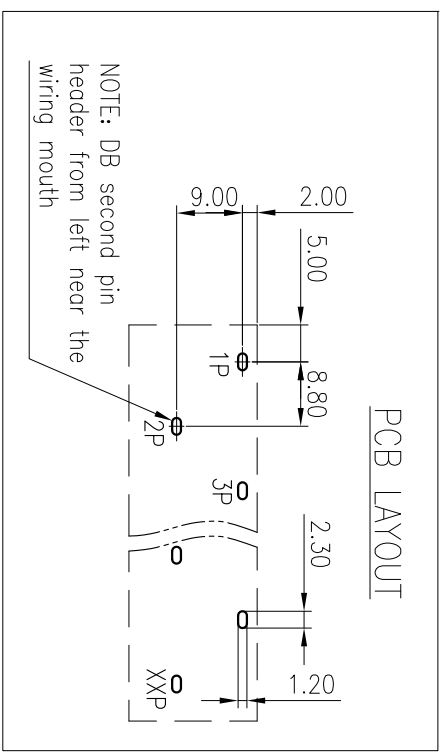
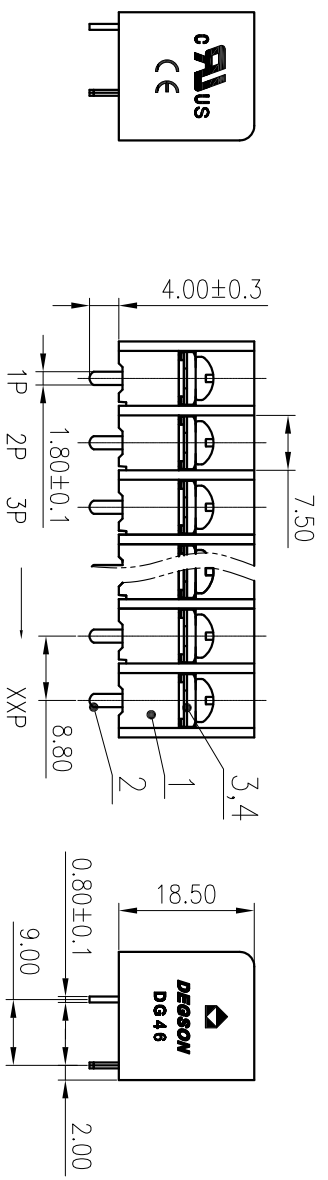


公差 (General Tolerances)(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z

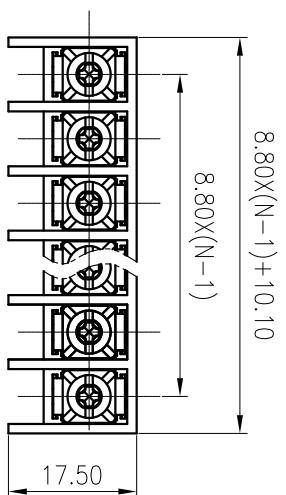

NOTE: DB second pin header from left near the wiring mouth

4	Pin Fastener	Steel	Ni Plated
3	Screw	Steel	M4/Ni Plated
2	Pin Header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		600/20	600/20
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/ Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		1000/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8	8
额定扭矩/Torque Tightening(N.m/Lb.in)		M3.5, 1.0/8.78	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)		0.2~4/22~12	
间距/Pitch(mm)/线数范围/Poles		8.8/N=02~24P	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: LDD 07/23/15"

DRAWING NO.: DG46-C42

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE

REV	ECN	DESCRIPTION	DRAFT	DATE

DEEGSON® NINGBO DEEGSON ELECTRICAL CO., LTD

NAME: DG46-DB-XXP-1Y-00A(H)

宁波高松电子有限公司

NINGBO DEEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG46-C42

TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET 1/1

REV TO