
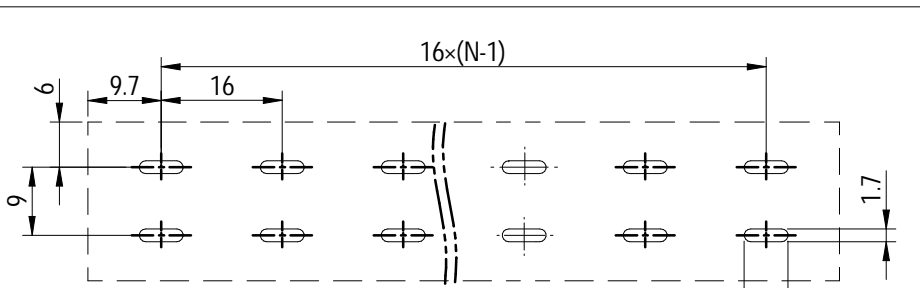

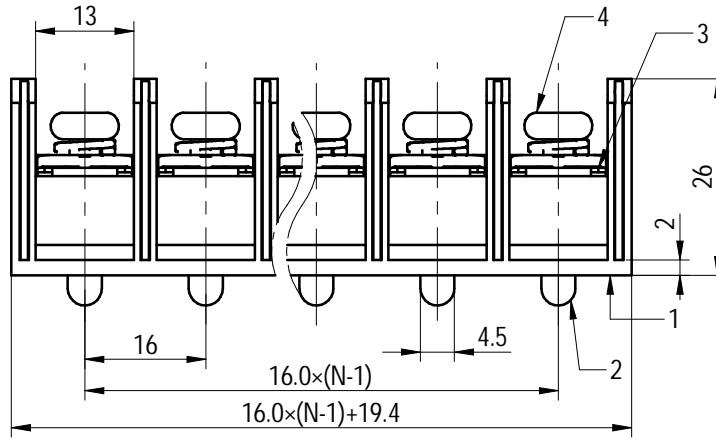
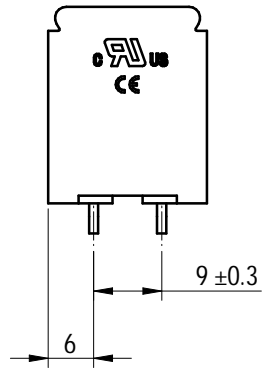
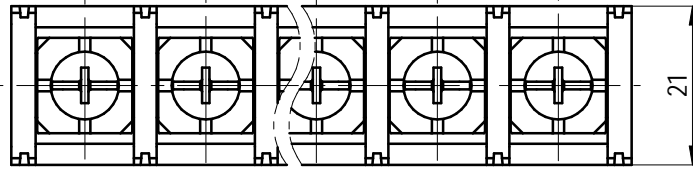


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicitly authorized by Degson. All rights reserved for patent. 未经授权复制或传播本文件内容，或在本文件基础上进行发明、实用新型或外观设计专利的申请，均属于侵权行为。

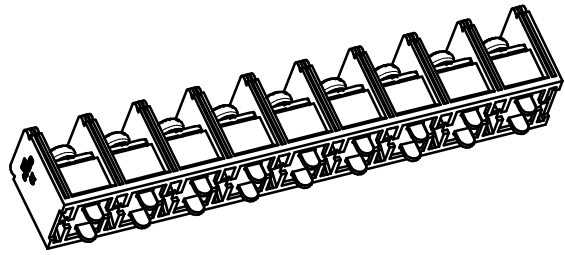

PCB LAYOUT

未注公差/General tolerances(mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screws	Steel	M5/Ni Plated
3	Nut	Steel	M5/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600V/110A	600V/110A	600V/5A
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	800/101	1000/101	1000/101
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	6
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M5, 2.5/22		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	8~2 / 6~25		
间距/Pitch(mm)/线数范围/Poles	16/N=2P~20P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:		
APPD:		MAT NO./REV:	/ 00.01 MAT STATUS: 批量		
CHKD:		NAME			
DRFT:		DG88-XXP-13-00Z(H)			
DRAWING NO. 200069035		TYPE CUSTOMER DRAWING		DRAWING STATUS work	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
01		增加IEC电流电压参数		