



未注公差/General tolerances(mm)													0.1/10
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50	±2'
端口数/Port number												8	
防护等级/Protection Degree												IP30	
工作温度/Operating temperature												-40~+75℃	
电源/Power												24 VAC 50/60Hz or 12/24/48 VDC	
安装方式/Installation mode												DIN35mm	
印字为激光打标, 印字内容清晰, 无断线等/Printing for laser marking,printing content is clear ,no broken line,ect													

标签丝印模板
Label silk screen printing template


DSW-A8K0008
DSW-A8K0080

产品序列号
随产品出厂自动生成;
Product serial number
Automatically generated with the product factory;


DSW-A8K0107
DSW-A8K0206

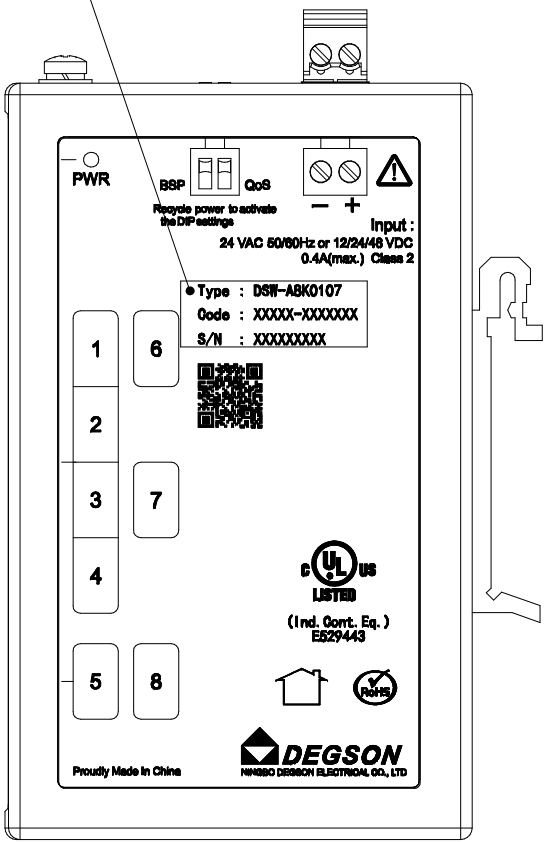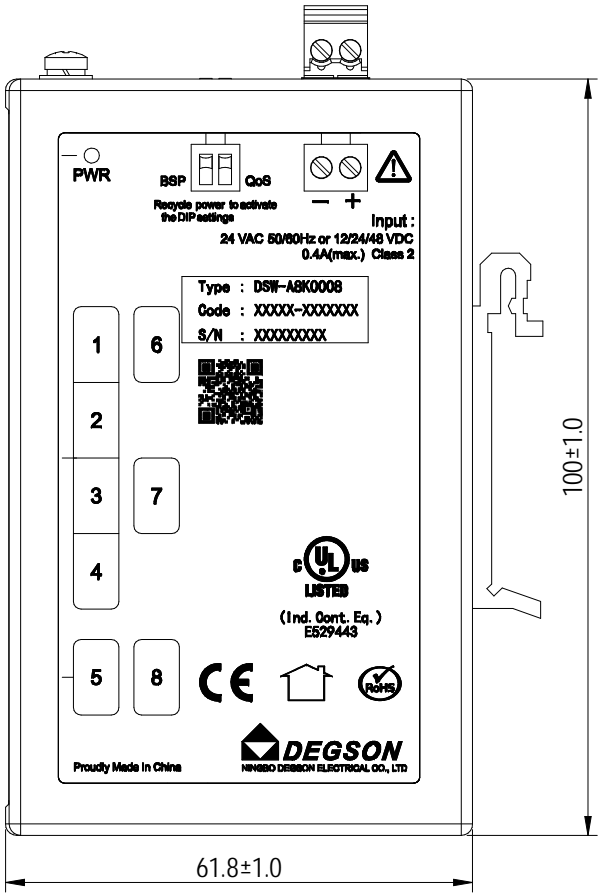


网口处丝印视图
Silk-screen view of a network port

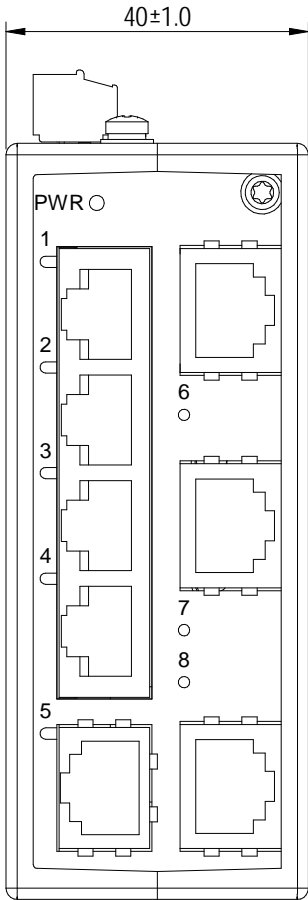


DSW-A8K0008
DSW-A8K0080

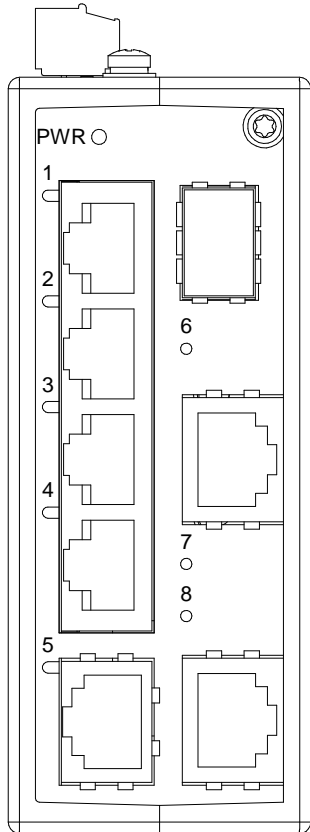

DSW-A8K0107

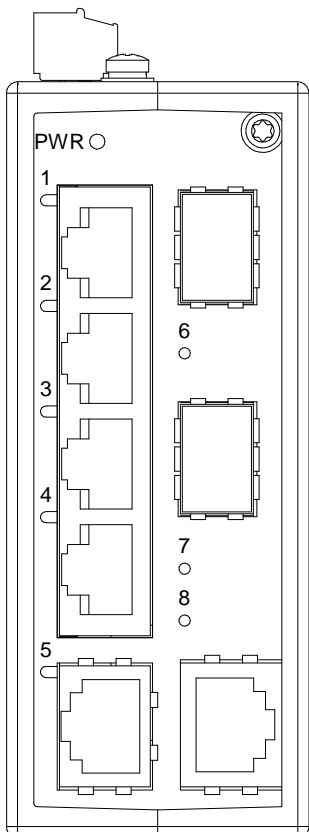

DSW-A8K0206

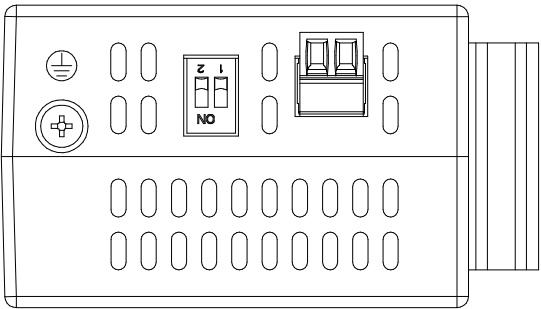

			MATERIAL:		SURFACE/COLOR:	
APPD: LGL			2024.09.13		NAME	
CHKD: MEK			2024.09.10		DRAWING NO.	
DRFT: GXJ			2024.09.02		TYPE	
REV			ECN		DRAWING STATUS	
DESCRIPTION			DRAFT		SCALE	
DATE			A3		SHEET	
200306575			CUSTOMER DRAWING		1:1	
200306575			已发布		1/1	