

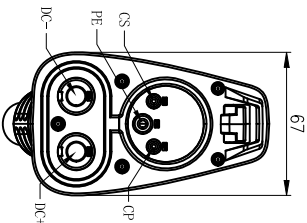




Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。

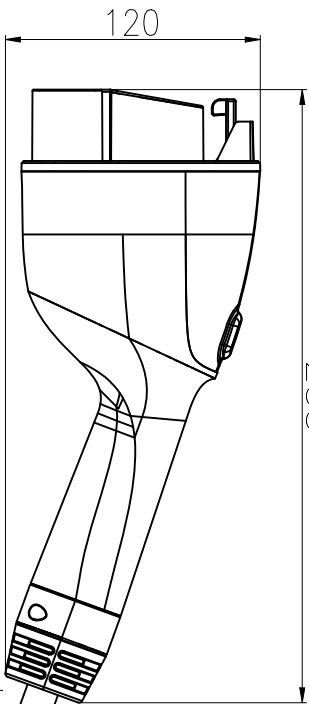

Wiring diagram

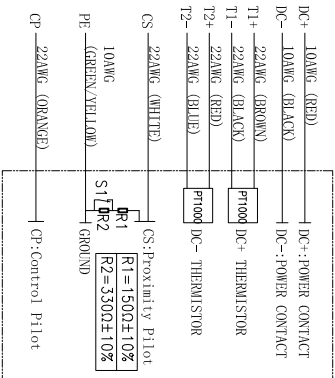

(Straightening measurement)

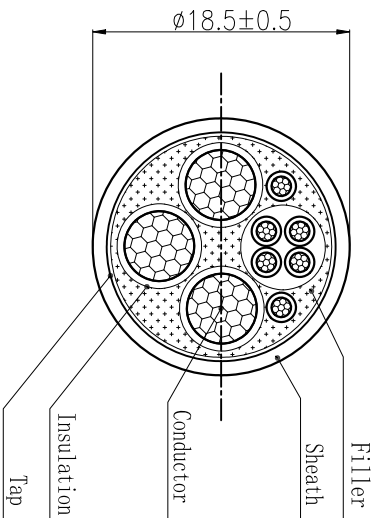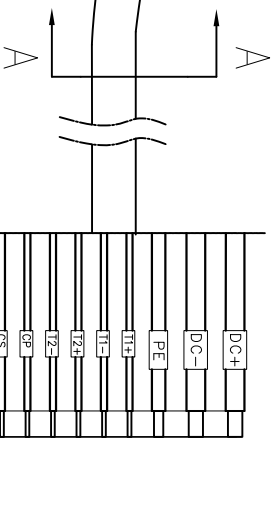

A-A

Laser Printing Note:

MADC-S-050A-V-03-5.0M-10A(H)  
50A 1000V DC  
TYPE 3S  
OP-40~+50°C  
20xxxxx-xxx

CAUTION-Do not use this product if any damage  
ATTENTION - n'utilisez pas ce produit s'il y a  
des dommages

OR 内容:  
(尺寸 10\*10mm)  
YYMMDDSSSS  
流水号: 0000-9999  
DEGSON  
年, 01-12  
月, 01-25  
日, 01-31  
年, e.g. 25 代表 2025年

Total Length	Tolerance
0 ~ 1000mm	±50
1001 ~ 5000mm	±100
>5000mm	±200

额定电压/电流/Rated voltage/Current	1000V DC/50A
绝缘电阻/Insulation resistance	>100MΩ, 500V DC 1min
耐压/Withstanding voltage	DC+ /DC- and PE, 4200V DC 1min
防护等级/Ingress protection	DC+ and DC-, 4200V DC 1min
插拔寿命/Insertion/Pullout times	TYPE 3S / IP67 (ENCLOSURE) 10,000 Times
插拔力/Insertion/Pullout force	<75N
使用温度范围/Operating temperature (°C)	-40 ~ +50°C
线材规格/Cable specification	3*10AWG+6*22AWG Black
标准/Reference standard	SAE-J1772, IEC 62196-3, UL2251
符合RoHS环保要求/Conform to RoHS	Yes

APPD:	NAME	MATERIAL:	SURFACE/COLOR:
CHKD:	MADC-S-050A-V-03-5.0M-10A(H)	MAT NO./REV: DO-1	MAT STATUS:
DRAFT:	DRAWING NO.	TYPE	DRAWING STATUS
	CUSTOMER DRAWING		SCALE
			SHEET
			1/1

DO-1	ECN	DESCRIPTION	DRAFT	DATE
REV				

APPD:	CHKD:	DRAFT:	A4
			20mm