



公差/General tolerances(mm)	
0	>3
~	>6
3	~10
6	~18
10	~30
18	~50
30	~80
50	~120
80	~180
120	~250
180	~315
250	~400
315	~500
400	~500
500	~500
~	~500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±1.05	±1.15
±1.60	±2.20
±2.50	±2.50
0.1/10	±2

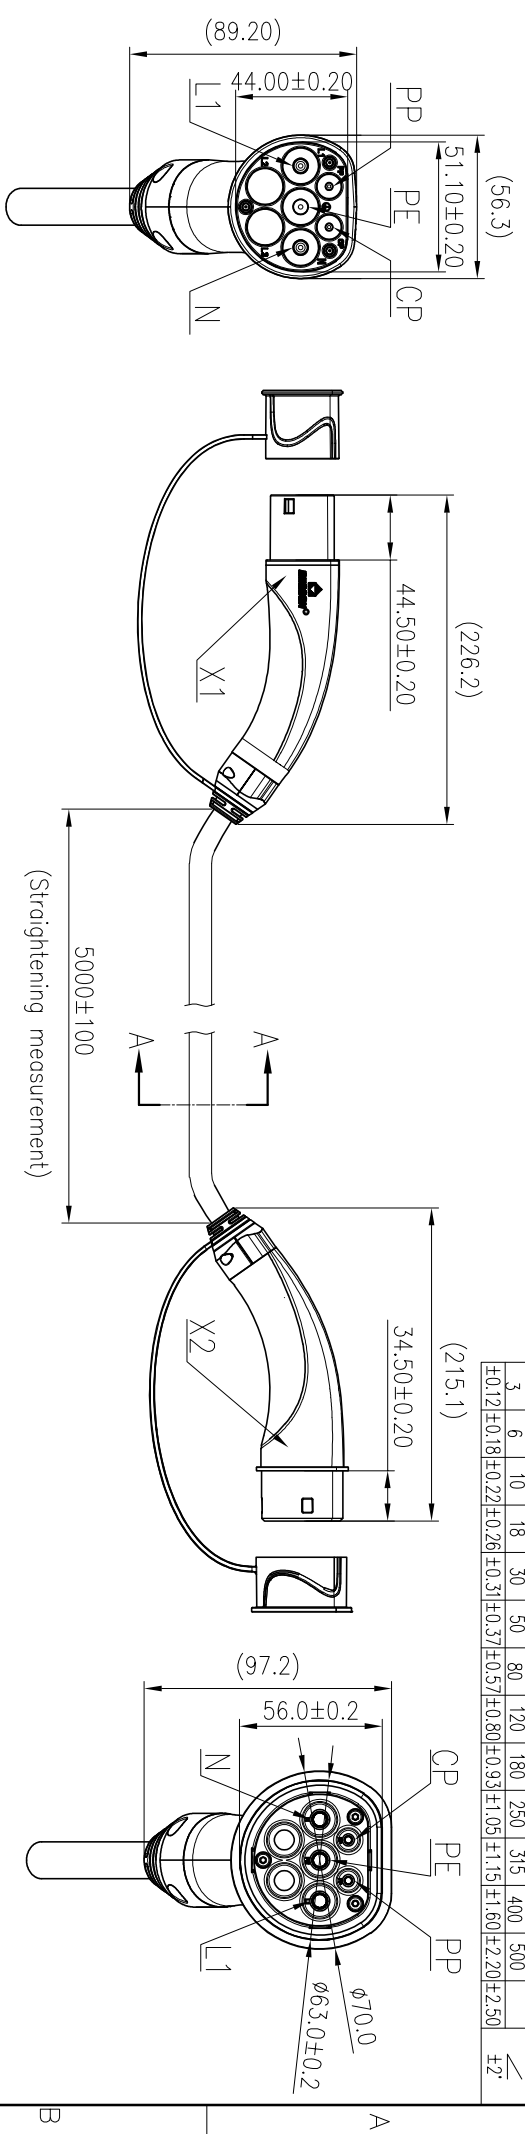


Wiring diagram
POWER SUPPLY
ELECTRIC VEHICLE

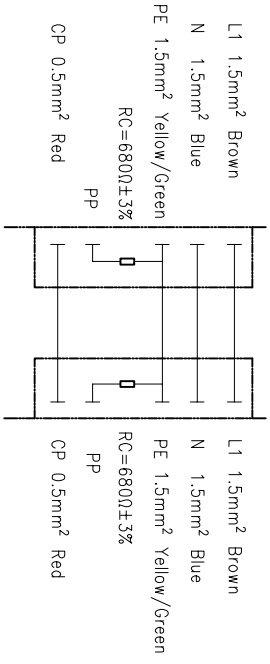

X1
Laser Printing Front Note:
DEGSON
Laser Printing Book Note(Attrid):
MEAC-S-020A-P21-03-5.0M-10AH
20A 250V AC
IEC 62196-2:2022
IP67
20xxxxxx-xxxx

X2
Laser Printing Front Note:
DEGSON
Laser Printing Front Note(Attrid):
MEAC-S-020A-V21-03-5.0M-10AH
20A 480V AC
IEC 62196-2:2022
IP67
20xxxxxx-xxxx

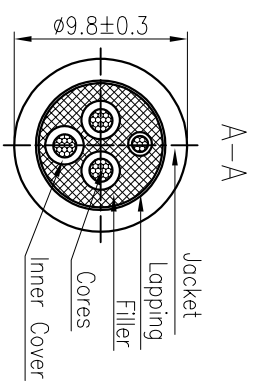

额定电压/Rated Voltage/Current	250V AC/20A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L, N and PE .2500V AC 1min L and N .2500V AC 1min
防护等级/Ingress Protection	IP67
插接寿命/Insertion/Pullout Times	10,000 Times
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*1.5mm²+1*0.5mm² Black
标准/Reference standard	IEC 62196-2:2022
符合RoHS环保要求/Conform to RoHS	Yes

REV	ECN	DESCRIPTION	DRAFT	DATE	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
					MEAC-S-020A-V21P21-03-5.0M-10A(H)	CUSTOMER DRAWING		1:3	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵权者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。