
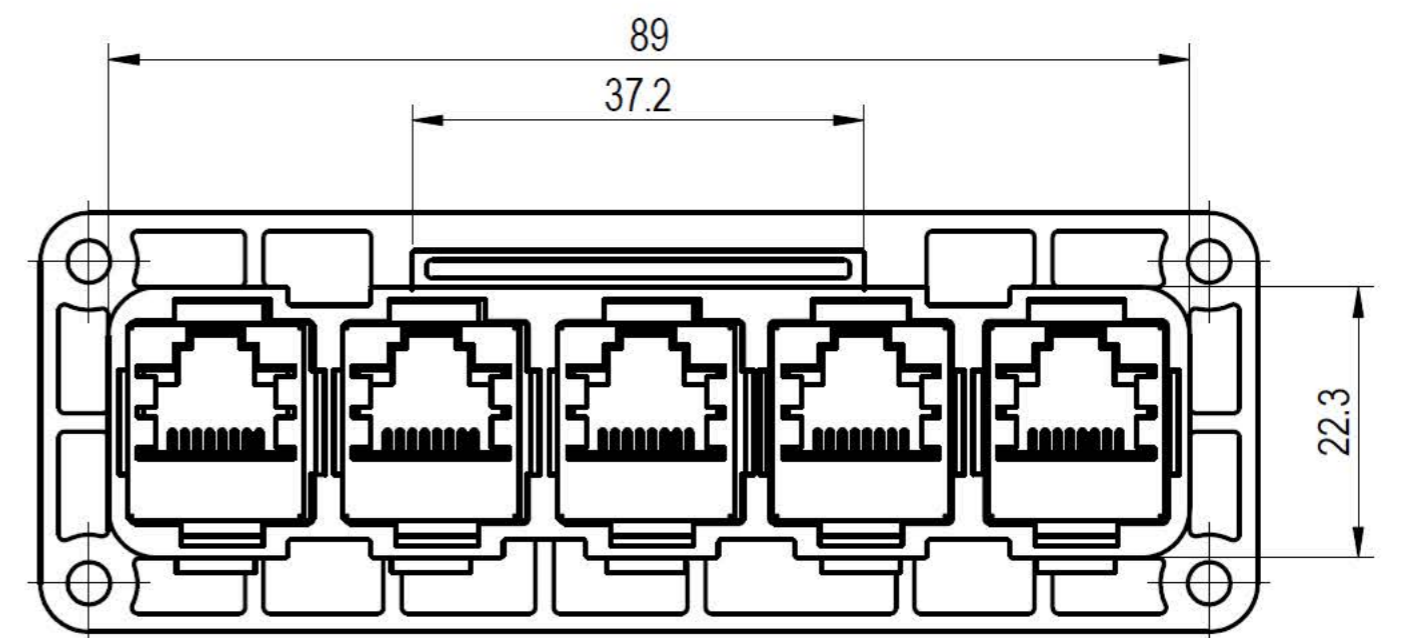


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担法律责任。本公司保留对专利及外观设计的所有权利。



陈海东  
2024.9.18

未注公差/General tolerances (mm)														0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

额定电压/Rated Voltage/Current	150V/1.5A
绝缘电阻/Insulation resistance	1000MΩ/500VDC
接触电阻/Contact resistance	20mΩ
传输速率/Transmission rate	CAT5E
插入/拔出力/Insertion/extraction force	≤30N
使用温度范围/Operating temperature	-40~+85°C
阻燃等级/Flame retardant rating	UL94V-0
符合RoHS环保要求/Conform to RoHS	Yes

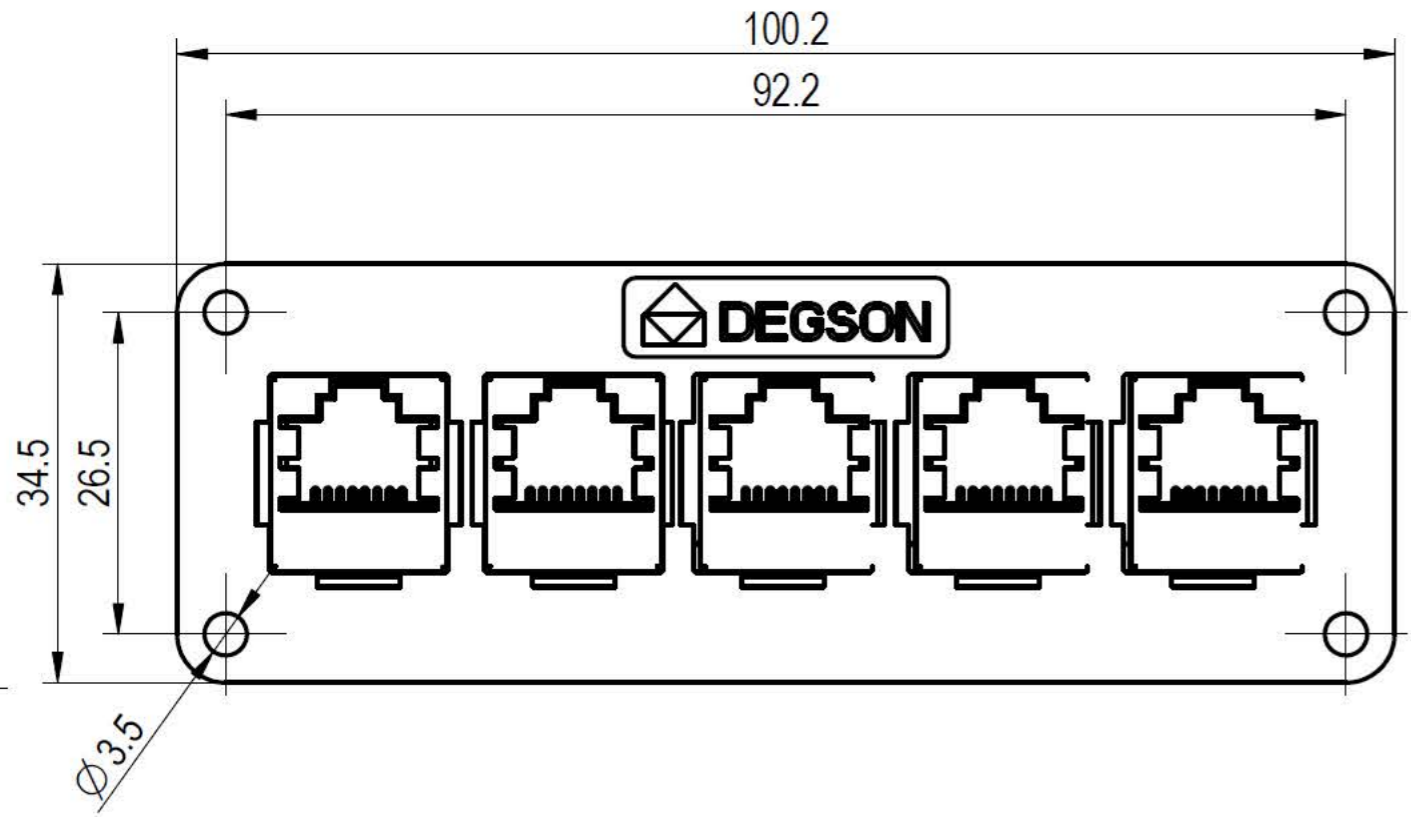

建议开孔尺寸:

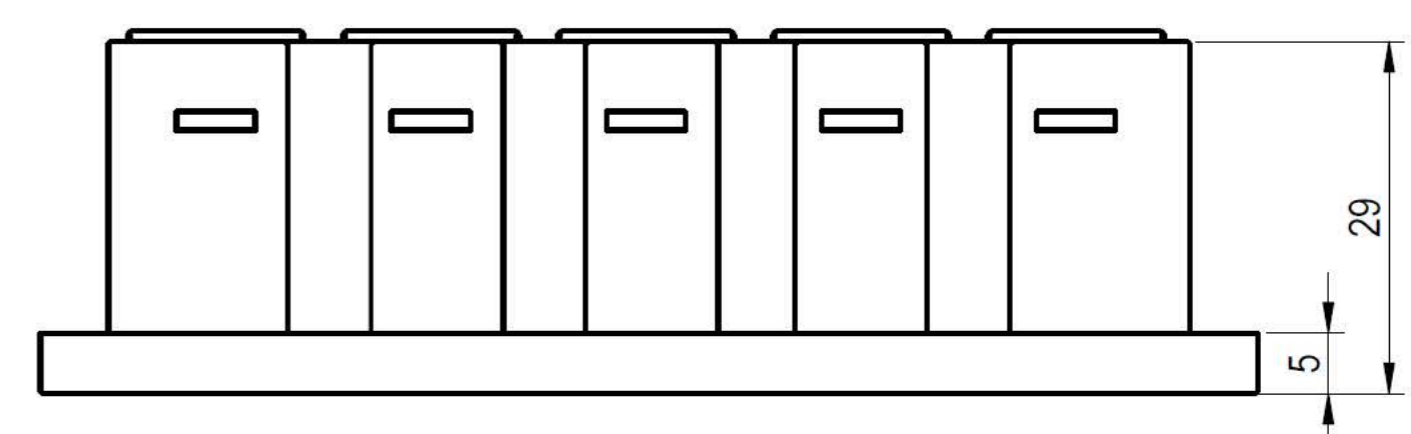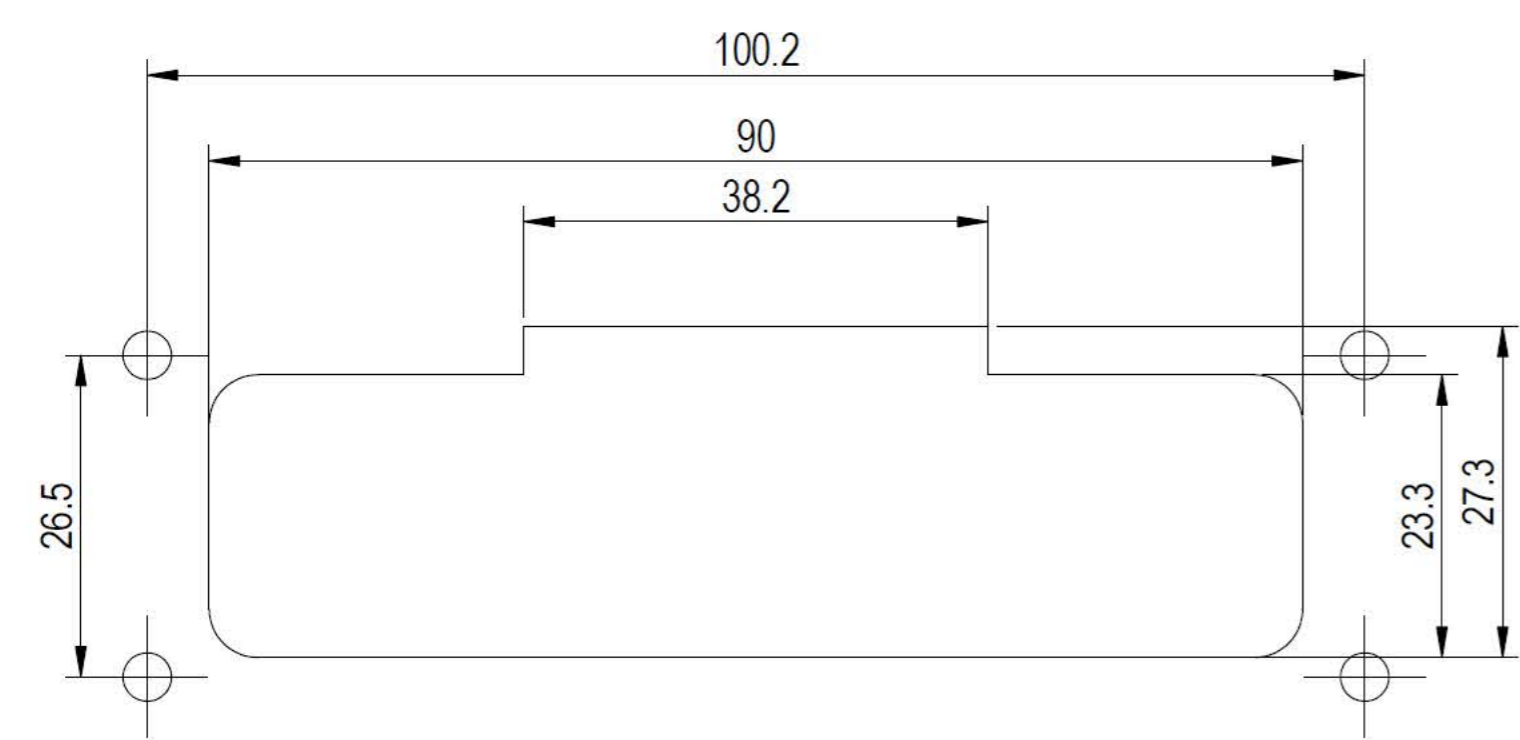

图纸版本	ECN	变更描述	舒健	2024.09.18	DRFT: 舒健	2024.09.18	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
REV	ECN	DESCRIPTION	DRFT	DATE	A4		200309853	CUSTOMER DRAWING	图纸状态	1:1	1/2

	MATERIAL: 材质	SURFACE/COLOR: 表面处理
	MAT NO./REV: 物料编码 / 版本	MAT STATUS: 物料状态
APPD: 核准人	核准日期	NAME
CHKD: 审核人	审核日期	五芯RJ45