
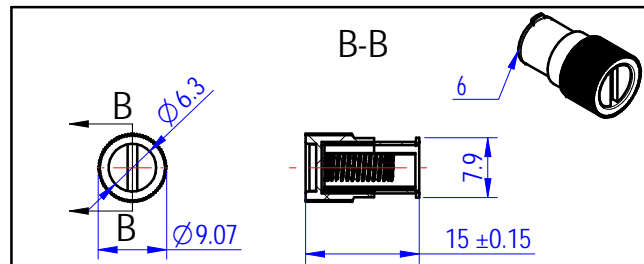

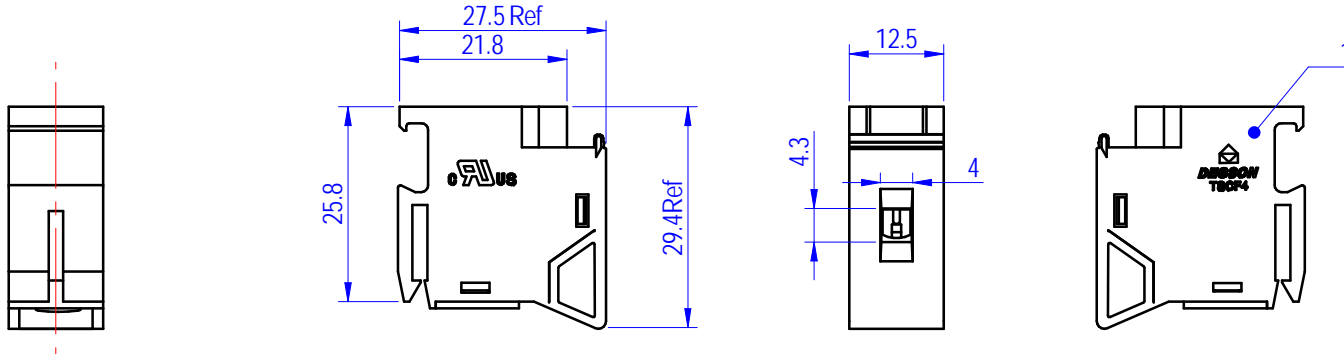


未注公差/General tolerances (mm)												0.1/10 ±2'		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

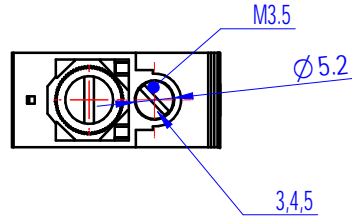

Note: the fuse holder does not fit into the body, and the finished product is shipped in the same inner box

ITEM	NAME OF PART	MATERIAL	NOTES
6	Fuse holder	/	/
5	Current carrier	Copper	Sn Plated
4	Cage	Copper alloy	M3.5/Ni Plated
3	Screw	Steel	M3.5/Zn Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94 V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	250/10		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3.5, 0.8/7.0		
线径范围 硬线和软线/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )	30~10 / 0.5~4.0		
线数范围/Poles	N=01P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE	157U		

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: / 00		MAT STATUS: 批量	
APPD: 蓝贵凡 2025.02.10	NAME		
CHKD: 汪德荣 2025.02.10	TSCF4-01P-15-1000Z (H)		
DRFT: 包新棉 2025.02.10	DRAWING NO. 200306222	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布
SCALE 2:1		SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00			包新棉	2025.02.10

Transfer or duplication of this document as well as the utilization or summation of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、软件著作权、商标、注册、注册商标、专利、实用新型、外观设计、软件著作权、商标、注册、注册商标外，所有权利均保留。