

DEM-R-AC1

特点

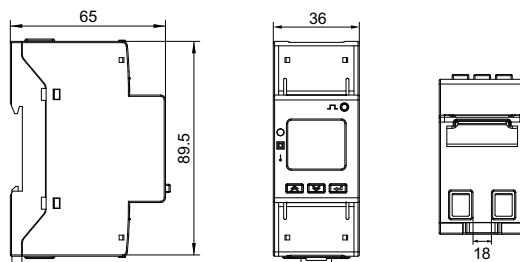
- 最大可直接接入80A
- 高精度设计, Class 1/Class B
- 支持正反向复费率计量
- Modbus RTU (RS485)
- 全面认证, CE, MID

Features

- Max 80A direct connection
- Accuracy of measuring Class 1/Class B
- Support Bi-directional metering of multi-rate
- Modbus RTU (RS485)
- Complete approval, CE, MID

规格参数 Specification

电压输入 Voltage input	额定电压 Rated voltage		AC 220V/230V
	电压范围 Voltage Range		AC 75~260V
	参比频率 Reference frequency		50Hz
电流输入 Current input	电流规格 Reference current		0.5-1 (80) A / 10 (80) A
测量性能 Measurement	测量精度 Accuracy of measuring	GB/T17215.321-2021 / GB/T 17215.321-2008	B级 / 1级 Class B/Class 1
时钟精度 Clock accuracy			误差≤0.5s/d Error≤0.5s/d
脉冲 Active pulse	脉冲常数 Pulse constant		1000imp/kWh
通信 Current input	接口 Interface		RS485(A+, B-)
	协议 Protocol		MODBUS-RTU, DL/T645-07, DL/T645-97
环境条件 Environment	工作温度 / 储存温度 Operating temperature / Storage temperature		-25°C~55°C / -40°C~70°C
	相对湿度 Relative humidity		≤95% (无凝露) ≤95% (without condensation)
	海拔高度 Altitude		≤2000m

产品尺寸图 Dimensional Drawing


DEMR-AC1