
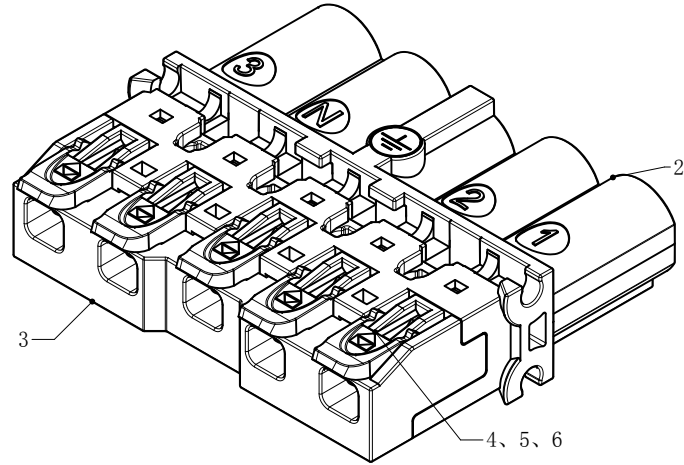
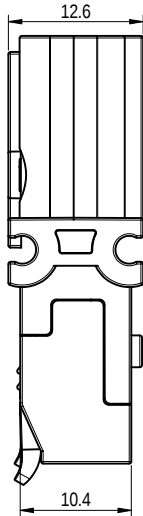
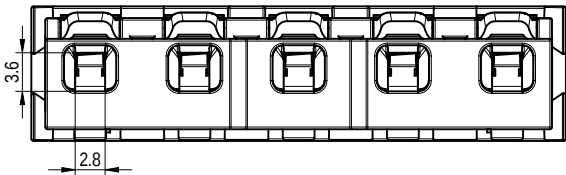
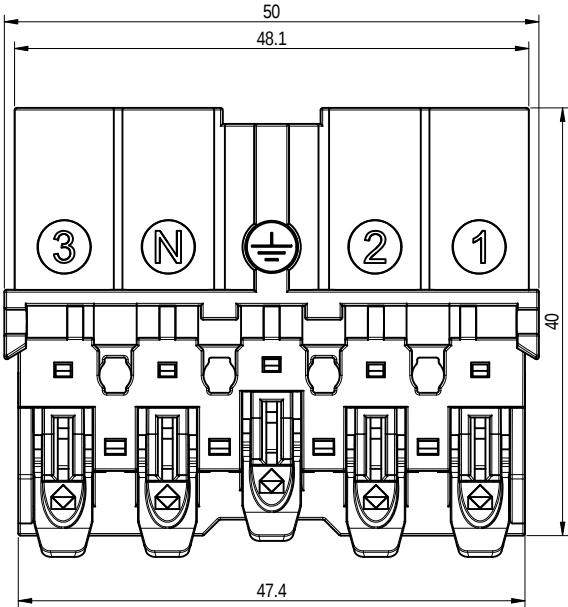



Transfer or dedication of this document as well as the utilization or reproduction of its contents are prohibited under penalty of damages. All rights reserved for patent. 禁止以任何形式或手段对本文档进行复制或传播，否则将承担法律责任。保留所有权利，侵权必究。

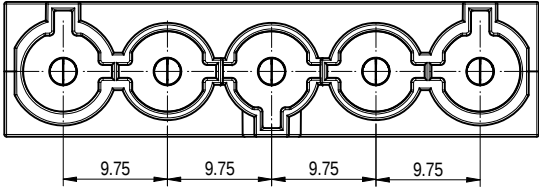

6	Button	PA66	UL94V-0
5	Spring	Stainless steel	/
4	Male pin	Copper	Sn Plated
3	Cover	PA66	UL94V-0
2	Housing	PA66	UL94V-0
1	Lock_hook	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard: (UL1977)				
额定电压/电流/Rated Voltage(V)/Current(A)		600V/20A		
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		800/32	1000/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8	8	6
螺丝扭矩/Torque Tightening(N·m/Lb.in)		ST2.9 1.0/8.8		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		20~12 / 0.5~4		
冷压头不带绝缘套管/with ferrule without plastic sleeve		20~14/0.5~2.5		
冷压头带绝缘套管/with ferrule, with plastic sleeve		20~14/0.5~2.5		
间距/Pitch(mm)/线数范围/Poles		9.75/N=05P		
剥线长度/Stripping length(mm)		12		
使用温度范围/Operating temperature(°C)		-40~+125		
符合RoHS环保要求/Conform to RoHS		Yes		

DGBSC-PG01M&F/4-00ZH-Lock_hook Scale 1: 1



APPD: 黄耀志		2026.06.09		NAME	
CHKD: 黄裕涛		2026.06.08		DGBSC-PG01M/4-05P-1Y-500Z(H)	
DRFT: 郑志佳		2026.06.05		DRAWING NO.	
REV		ECN		TYPE	
00				CUSTOMER DRAWING	
REV		DATE		DRAWING STATUS	
A3		200453775		已发布	
A3		1:1		SHEET	
				1/1	