

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、其他知识产权外，所有权利均归本公司所有。未经许可，不得复制或传播。 未经授权，不得复制或传播。

FOR-1755 Rev.2.2





2

3


4

5

6

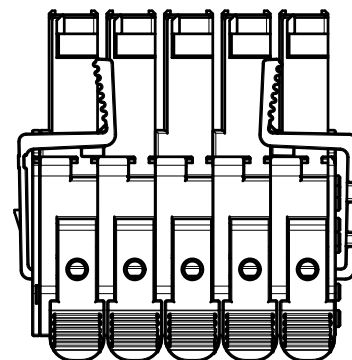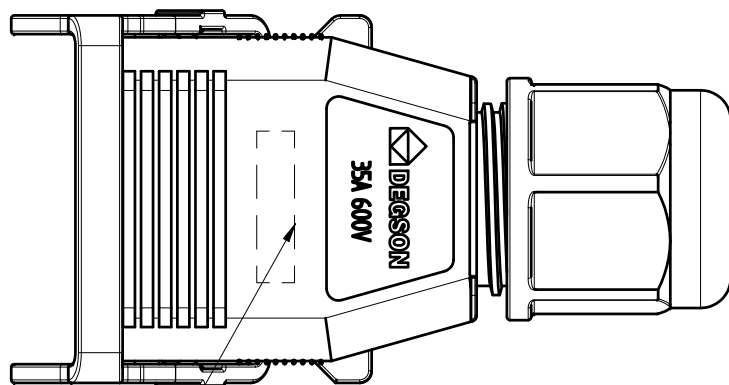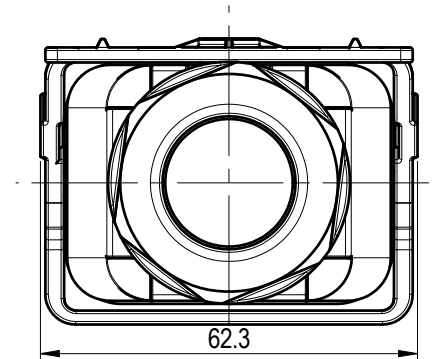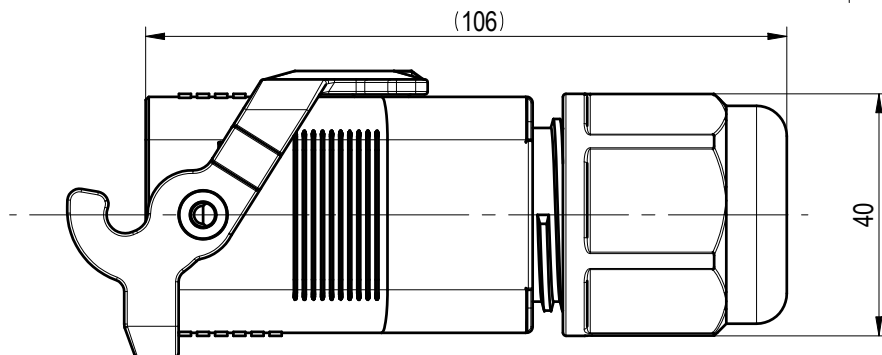


5EDGKDL-7.62-05P-11-37Z(H).

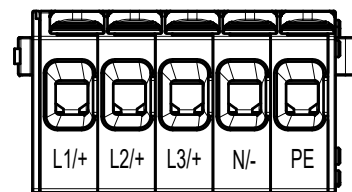


插芯出货前不装配
配件1pcs/套

生产日期: 20260817
字体: Arial
字高: 1.5

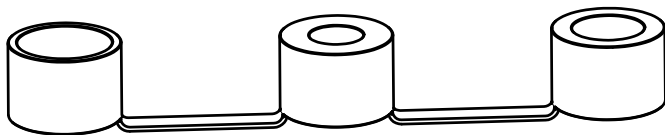

配件1pcs/套

技术参数/Technical Characteristics	
额定电压/Rated Voltage	600V AC
额定电流/Rated Current	35A
绝缘电阻/Insulation resistance	≥5000MΩ (干燥)
插拔次数/Mechanical working life(mating cycles)	50
使用温度范围/Operating temperature(°C)	-40~+85
耐电压/Withstanding voltage	3100V/min
接触电阻/Contact resistance	≤10mΩ
过电压等级/Overvoltage category	III
污染等级/Pollution degree	3
接线方式/Terminal	Push-in
锁板扭矩 M3 (N.m)	0.5
锁合扭矩 M4 (N.m)	1.2
防护等级/Ingress protection	IP67 (Mated)
海拔/Altitude	2000m
接线范围/Wiring range	10~12mm, 12~16mm, 16~21mm
环保要求/Conform	Rohs 2.0

		MATERIAL: 材质		General tolerances(mm):ISO 2768-mK		
		MAT NO./REV: 物料编码 / 版本		MAT STATUS: 物料状态		
APPD: 核准人	核准日期	NAME				
CHKD: Gao LL	2026.08.17	PV-AC-P-05P-10Z(H)				
DRFT: Zhu HF	2026.08.17	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4		/	CUSTOMER DRAWING	图纸状态	2:1	1/1

00	ECN	/	Zhu HF	2026.08.17
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6