

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和不正当竞争等权利外，本公司保留对涉及发明、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和不正当竞争等权利的所有权利。

FOR-1755 Rev.2.1

2

3

4

5


6

未注公差/General tolerances (mm)




0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 / 2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

技术要求/Technical requirements:



线缆规格/Cable specification	35mm², 线材外径13mm±1mm
重点管控符号/Key controlled symbol	*
使用温度范围/Operating temperature(°C)	-40~85
防水等级/Leveals of protection	IP66(互配)
符合RoHS环保要求/Conform to RoHS	Yes
阻燃等级/Flame retardant rating	UL94-V0
认证信息/Certification	TUV



A-A

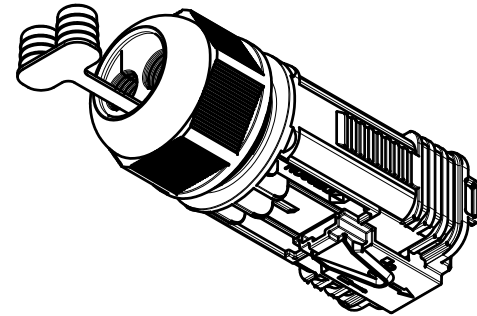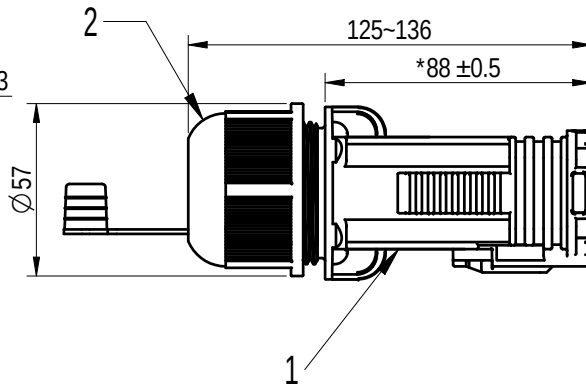

局部I

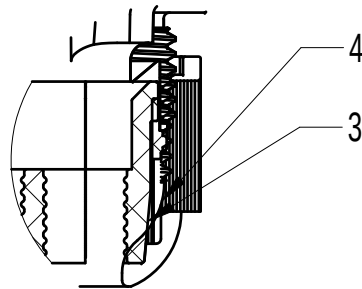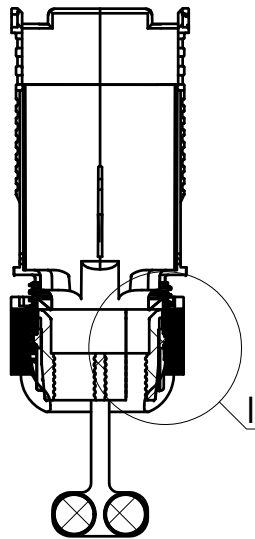

5	M8螺钉套装 (单独包装)	碳钢 镀锌镍合金	2
4	封线爪	PA66	1
3	密封塞	硅橡胶	1
2	锁线螺母	PC+20GF 黑色	1
1	塑胶壳体	PC+20GF 黑色	1
序号	名称	材料	数量

			MATERIAL:		SURFACE/COLOR:				
			MAT NO./REV: 29010000012-1 / 00.03		MAT STATUS: 批量				
APPD:			NAME						
CHKD:			PV-DC-MG-CS-2P-150A-6-CNG331 (CNE013)						
DRFT:			DRAWING NO.		TYPE		DRAWING STATUS	SCALE	SHEET
		A4	200316980		CUSTOMER DRAWING		work	2:1	1/1
									

00	ECN	DESCRIPTION	DRFT	DATE
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6