




Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权，否则禁止转让、复制、利用、交流本文件的内容，侵犯者将为赔偿责任。本公司保留对涉及实用、实用新型和外观专利的所有权利。

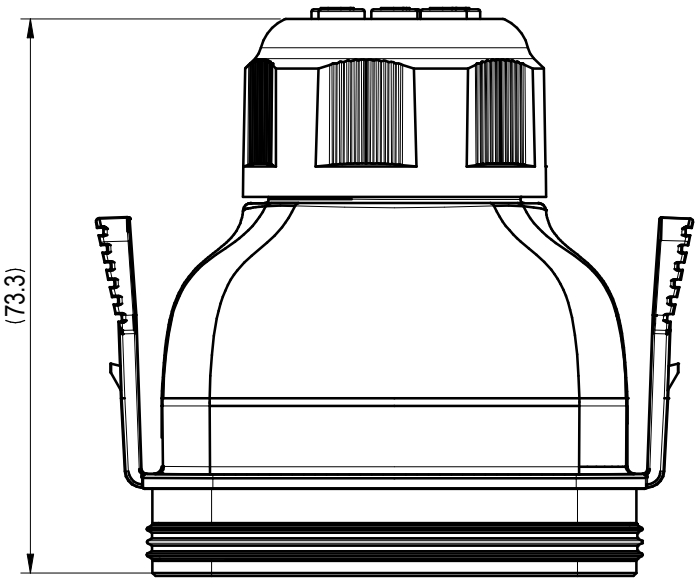

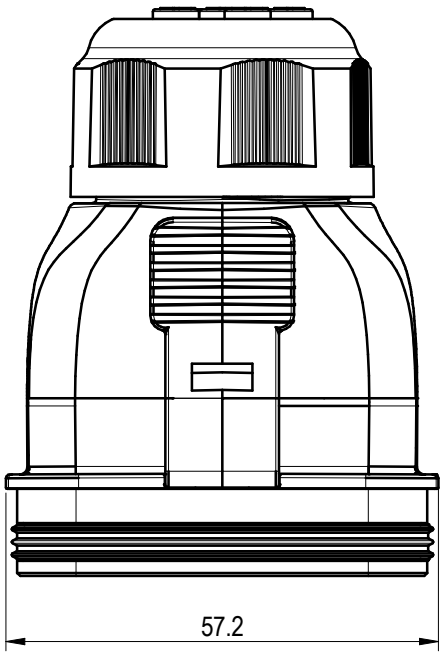

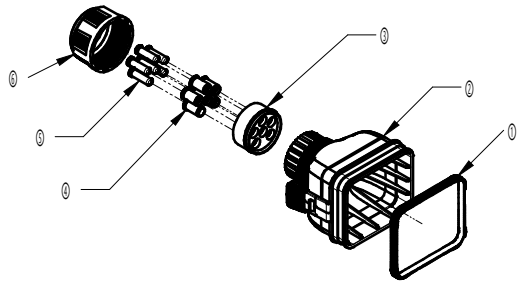

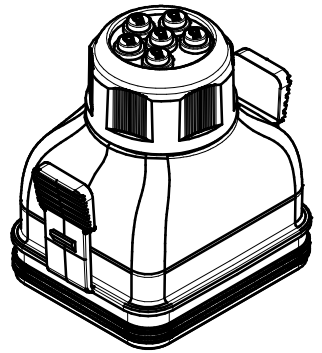

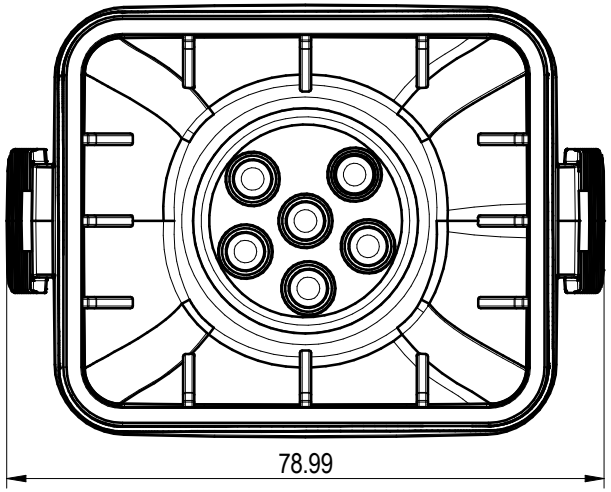

序号/Item	名称/Description	数量/QTY
6	螺帽/Nut	1
5	堵头/Plug	6
4	堵头套/Cap cover	6
3	夹线圈/Clamp coil	1
2	上壳/Housing	1
1	密封圈/O-Ring	1

技术参数/Technical Characteristics	
使用温度范围/Operating temperature(° C)	-40° C - +80° C
防护等级/Levels of protection	IP66
防护等级(未插合)/Levels of protection	IP2X
线径范围/Wire range	4-7mm²
环保要求/Conform	Rohs 2.0
重点管控符号/Key controlled symbol	*
未注公差/General tolerances(mm)	参考ISO 2768-mK

DEGSON

APPD:	核准人	核准日期	
CHKD:	审核人	审核日期	
DRFT:	设计人	设计日期	

A4 | mm (inch)

MATERIAL: 材质 | SURFACE/COLOR: 表面处理

MAT NO./REV: 物料编码 / 版本 | MAT STATUS: 物料状态

NAME: PV-BOX-P-68-58-00Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
图号	图纸类型	图纸状态	1:5	1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE