
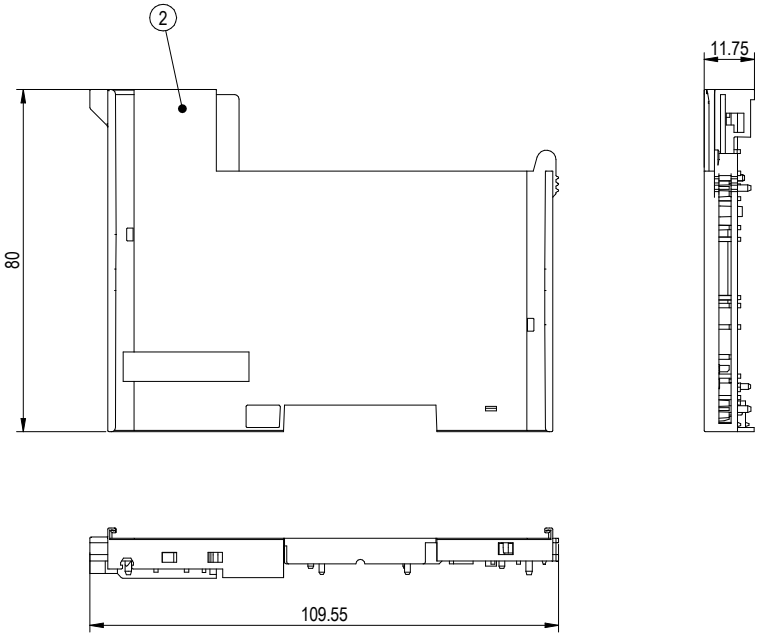


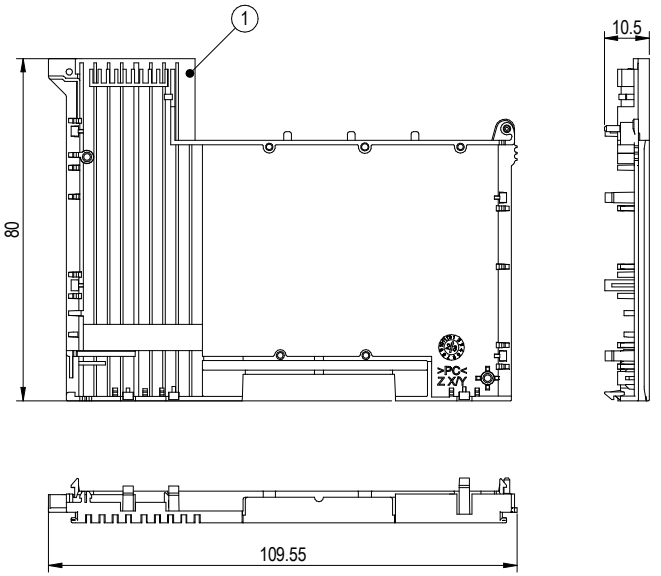



未注公差/General tolerances(mm)


0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°


UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	150/8	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	2.5	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~ 16/ 0.14~ 1.5		
线数范围/Poles	N= 18P		
剥线长度/Stripping length(mm)	8~ 10		
使用温度范围/Operating temperature(°C)	-40~ + 105		
符合RoHS环保要求/Conform to RoHS	Yes		


DF760(300)-G-1-03-00Z(H)	
电源夹片额定电压电流/Rated Voltage/Current	24V/10A
信号夹片额定电压电流/Rated Voltage/Current	5V/5A
使用温度范围/Operating temperature(°C)	-40~+155
符合RoHS环保要求/Conform to RoHS	Yes
回流焊承受温度/Reflow temperature(°C)	265

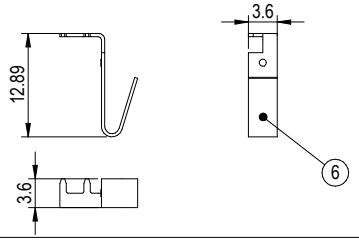


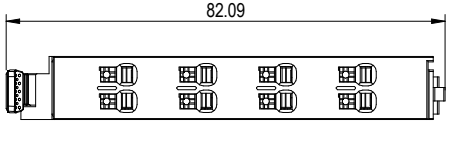


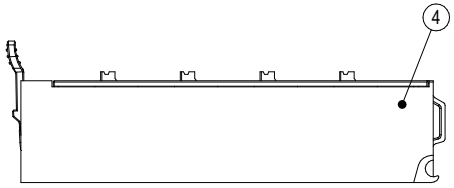





















please refer to the 3D model,
for those unmarked dimensions

Bulk shipment



6	Grounding	Copper alloy	Sn Plated
5	DF760(300)-G-1-03-00Z(H)	/	/
4	DF760-200-08P-C1-00Z(H)	/	/
3	Card rail foot	PA66	UL94V-0
2	Housing-L	PC	UL94V-0
1	Housing-R	PC	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REV	ECN	DESCRIPTION	DRFT	DATE
00		NEW DRAWING	黄圳阳	2026.05.07

DEGSON

APPD:	李振劳	2026.05.09
CHKD:	宗明忠	2026.05.09
DRFT:	黄圳阳	2026.05.07

A3 | mm (inch)

MATERIAL: | SURFACE/COLOR:

MAT NO./REV: 30060001178-1 / 00 | MAT STATUS: 批量

NAME: DF760-200-1-C1-00Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200444551	CUSTOMER DRAWING	已发布	1:1.25	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations.
未经许可禁止复制、传播或使用本文件及其内容，违者将承担赔偿责任。保留所有专利、实用新型或外观设计的权利。